





FIJATEC

¡La fijación correcta, para el ensamble perfecto!

ASME B18.2.1

TORNILLO HEXAGONAL GRADO 5

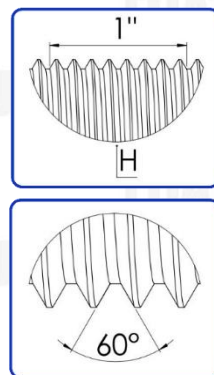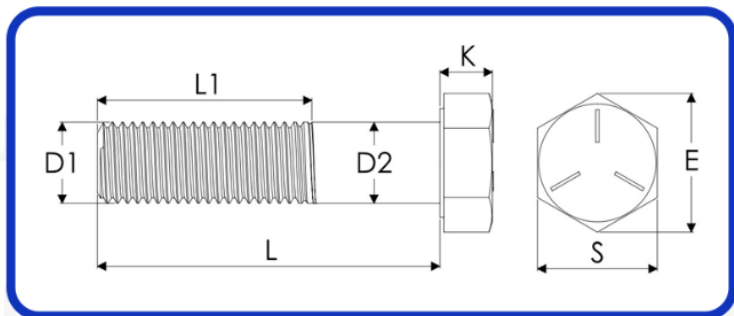

Diámetro nominal -D1-	Longitud de rosca -L1-		Diámetro del vástago -D2-	Llave -S-	Altura -K-	Distancia entre esquinas -E-	Hilos por pulgada -H-	
	≤ 6"	> 6"					UNC	UNF
1/4"	3/4"	1"	1/4"	7/16"	5/32"	1/2"	20	28
5/16"	7/8"	1-1/8"	5/16"	1/2"	13/64"	9/16"	18	24
3/8"	1"	1-1/4"	3/8"	9/16"	15/64"	41/64"	16	24
7/16"	1-1/8"	1-3/8"	7/16"	5/8"	9/32"	45/64"	14	20
1/2"	1-1/4"	1-1/2"	1/2"	3/4"	5/16"	27/32"	13	20
9/16"	1-3/8"	1-5/8"	9/16"	13/16"	23/64"	15/16"	12	18
5/8"	1-1/2"	1-3/4"	5/8"	15/16"	25/64"	1-1/16"	11	18
3/4"	1-3/4"	2"	3/4"	1-1/8"	15/32"	1-9/32"	10	16
7/8"	2"	2-1/4"	7/8"	1-5/16"	35/64"	1-1/2"	9	14
1"	2-1/4"	2-1/2"	1"	1-1/2"	39/64"	1-45/64"	8	12
1-1/8"	2-1/2"	2-3/4"	1-1/8"	1-11/16"	11/16"	1-57/64"	7	12
1-1/4"	2-3/4"	3"	1-1/4"	1-7/8"	25/32"	2-5/64"	7	12
1-3/8"	3"	3-1/4"	1-3/8"	2-1/16"	55/64"	2-21/64"	6	12
1-1/2"	3-1/4"	3-1/2"	1-1/2"	2-1/4"	15/16"	2-37/64"	6	12
1-3/4"	3-1/2"	3-3/4"	1-3/4"	2-5/8"	1"	3"	5	
2"	3-3/4"	4"	2"	3"	1-1/4"	3-21/64"	4.5	

fijatec.com



Azcapotzalco (55) 5561-7279

Vallejo (55) 5367-2424