







FIJATEC

¡La fijación correcta, para el ensamble perfecto!

ASME B18.2.2

TUERCA GRIPCO

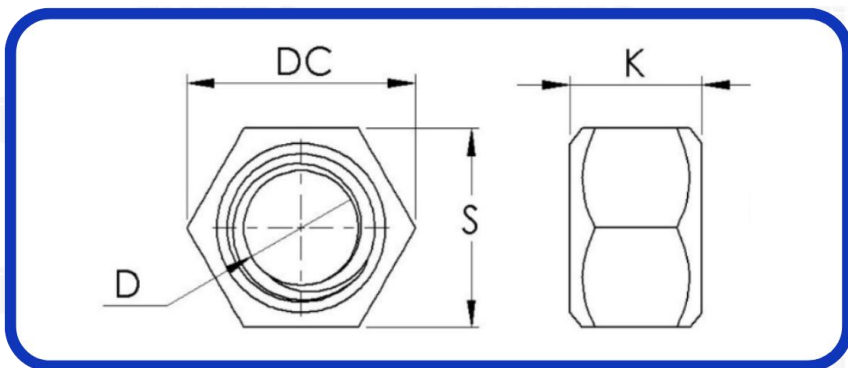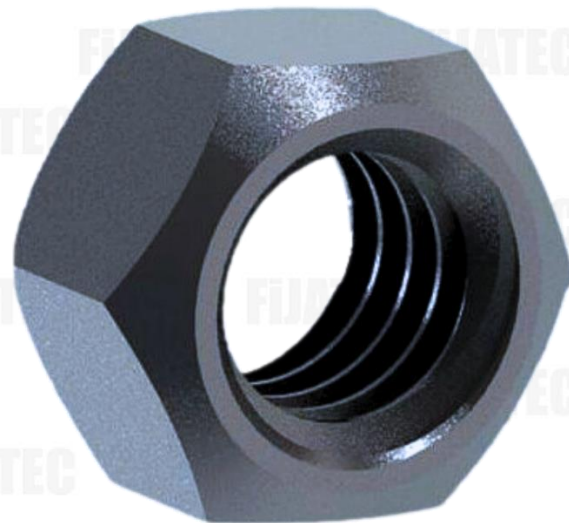

Diámetro nominal -D-	Altura -K-		Llave -S-	Distancia entre esquinas -DC-	Hilos por pulgada -H-	
	Grado B	Grado C			UNC	UNF
1/4"	1/4"	7/32"	7/16"	1/2"	20	28
5/16"	19/64"	17/64"	1/2"	9/16"	18	24
3/8"	23/64"	21/64"	9/16"	5/8"	16	24
7/16"	27/64"	3/8"	11/16"	25/32"	14	20
1/2"	1/2"	7/16"	3/4"	27/32"	13	20
9/16"		1/2"	7/8"	63/64"	12	18
5/8"	5/8"	35/64"	15/16"	1-1/16"	11	18
3/4"	23/32"	5/8"	1-1/8"	1-1/4"	10	16
7/8"	3/4"	5/8"	1-5/16"	1-15/32"	9	14
1"	7/8"	27/32"	1-1/2"	1-21/32"	8	14
1-1/8"	1"	31/32"	1-11/16"	1-57/64"	7	12
1-1/4"	1-1/16"	1-1/16"	1-7/8"	2-3/32"	7	12

fijatec.com



Azcapotzalco (55) 5561-7279

Vallejo (55) 5367-2424