





FIJATEC

¡La fijación correcta, para el ensamble perfecto!

ASME B18.16.3

TUERCA HEXAGONAL INSERTO NYLON

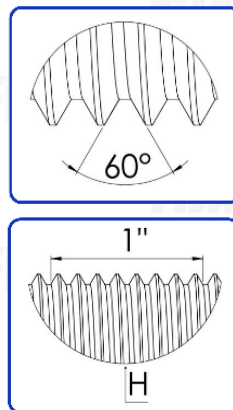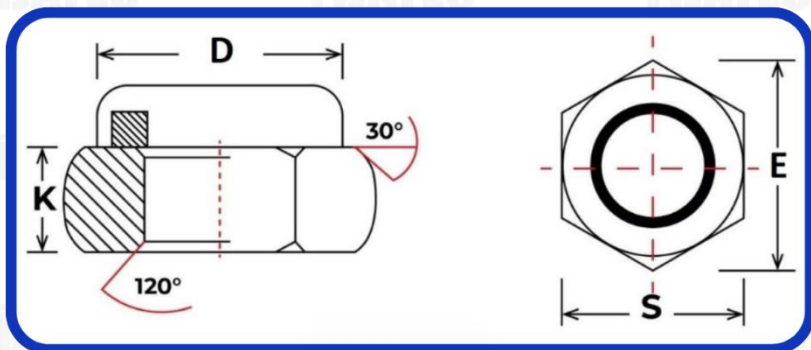

Diámetro nominal -D-	Altura -K-	Llave -S-	Distancia entre esquinas -E-	Hilos por pulgada -H-	
				UNC	UNF
# 5	1/8"	1/8"	1/4"	40	46
# 6	11/64"	1/8"	11/32"	32	40
# 8	15/64"	1/8"	3/8"	32	36
3/16"	15/64"	1/8"	13/32"	24	32
1/4"	9/32"	7/16"	1/2"	20	28
5/16"	11/32"	1/2"	37/64"	18	24
3/8"	13/32"	9/16"	21/32"	16	24
7/16"	15/32"	11/16"	25/32"	14	20
1/2"	37/64"	3/4"	55/64"	13	20
9/16"	5/8"	7/8"	1"	12	18
5/8"	47/64"	15/16"	1-5/64"	11	18
3/4"	53/64"	1-1/8"	1-9/32"	10	16
7/8"	15/16"	1-5/16"	1-33/64"	9	14
1"	1"	1-1/2"	1-47/64"	8	14
1-1/8"	1-9/64"	1-5/8"	1-55/64"	7	12
1-1/2"	1-39/64"	2-3/16"	2-31/64"	6	12

fijatec.com



Azcapotzalco (55) 5561-7279

Vallejo (55) 5367-2424