




## **ASME B18.2.1**

## **TORNILLO HEXAGONAL INOX 304 (18-8)**

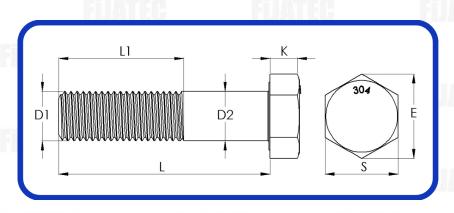







	Diámetro nominal -D1-	Longitud de rosca -L1-		Diámetro del	Llave	Altura	Distancia entre	Hilos por pulgada -H-	
		≤ 6"	> 6"	vástago -D2-	-S-	-K-	esquinas -E-	UNC	UNF
	3/16"	2"		3/16"	5/16"	7/64"	11/32"	24	32
	1/4"	3/4"	1"	1/4"	7/16"	5/32"	1/2"	20	28
	5/16"	7/8"	1-1/8"	5/16"	1/2"	13/64"	9/16"	18	24
	3/8"	1"	1-1/4"	3/8"	9/16"	15/64"	41/64"	16	24
	7/16"	1-1/8"	1-3/8"	7/16"	5/8"	9/32"	45/64"	14	20
	1/2"	1-1/4"	1-1/2"	1/2"	3/4"	5/16"	27/32"	13	20
	5/8"	1-1/2"	1-3/4"	5/8"	15/16"	25/64"	1-1/16"	11	18
	3/4"	1-3/4"	2"	3/4"	1-1/8"	15/32"	1-9/32"	10	16
	7/8"	2"	2-1/4"	7/8"	1-5/16"	35/64"	1-1/2"	9	14
	1"	2-1/4"	2-1/2"	1"	1-1/2"	39/64"	1-45/64"	8	12
	1-1/8"	2-1/2"	2-3/4"	1-1/8"	1-11/16"	11/16"	1-57/64"	7	12
	1-1/4"	2-3/4"	3"	1-1/4"	1-7/8"	25/32"	2-5/64"	7	12

fiiatec.com

